

# TECHNICAL DATA SHEET



## EVOCAB SPLIT N 450

Split cable protection pipes

According to  
EN 61386-1  
EN 61386-24

### PRODUCT DESCRIPTION

EVOCAB SPLIT N 450 split pipes consist of two halves and integrated locking system that can safely enclose an existing bundle of cables. It is a divisible pipe solution with an integrated connection-locking system, which can be installed quick and easy, without requiring any tools. Pipe standard colour is black with red clamps.


Material: PP-EPDM (high quality recycled plastic).

Pipes are manufactured according to EN 61386-1; EN 61386-24.

### PRODUCT AREA

EVOCAB SPLIT N 450 pipes are designed to assist the repairs of power cable, electrical wire, telecommunication, television, and signal cable line ruptures and for mechanical protection and insulation of cables in sections where cable protection pipes of other types cannot be used. These pipes can be installed under and over the ground in open trenches.

Bend angle at connection points up to 22,5°.

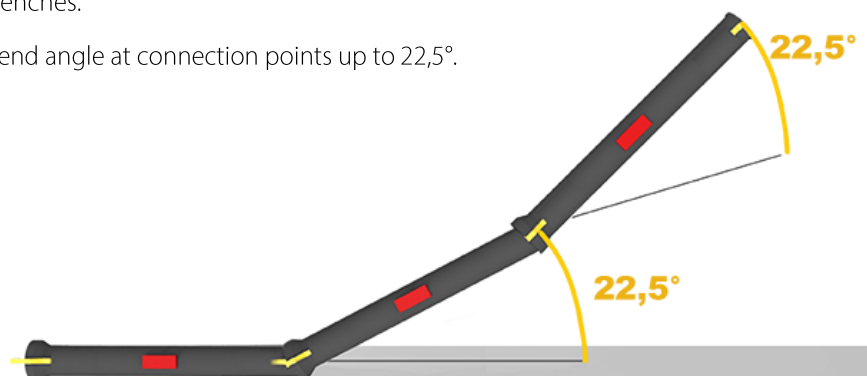

Compression strength:

**450**

Impact resistance:

**N (normal)**

**Open product**

### PRODUCT DIMENSIONS

Outer OD, mm	110.0	160.0
Inner ID, mm	102.0	150.0
Wall thickness, mm	4	5
Length, m	1,2	1,2
Bend radius, 1m	≤22,5°	≤22,5°

### PRODUCT PARAMETERS

Parameter	Value	Test method
Materials	PP-EPDM	
Combustion	Combustible	EN 61386-24
Impact resistance	N	EN 61386-24
Compression strength, N	450	EN 61386-24