


GIGA chamber _____ mm

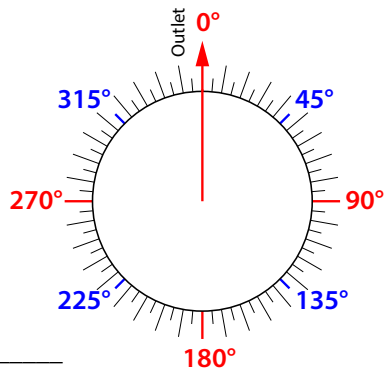

Chamber No. _____

Construction depth (from **Z** to **T**), **H** [m] _____

Base construction: with flow channel without flow channel*

* for solution without flow channel the minimum outlet height from the chamber base is **200 mm (0.2 m)**.

Sediment trap: height **h** (from **T** to **P**): _____ m

FOR INSPECTION: height from the ground surface to the chamber base (from **Z** to **P**) _____ m

Chamber type: **K1** - utility wastewater chamber **K2** - rainwater sewerage chamber **G** - gullie **D** - drainage chamber

Ladders: Yes No


Reinforced concrete plate: Yes No

Cover construction (K): Yes No

Load capacity class: B125 C250 D400

Type of chamber cover: self-leveling type cover stationary type cover self-leveling type with grate

other (_____)

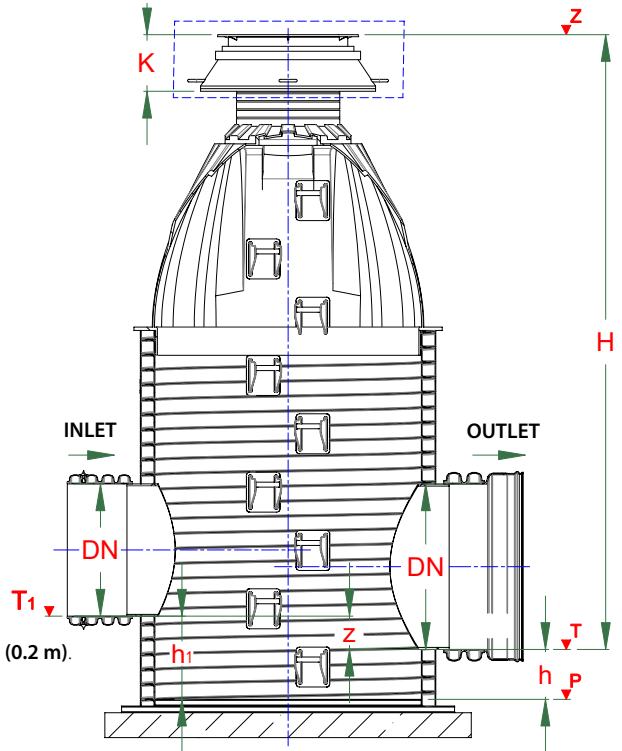

Connection type:

1 - DN/OD smooth-wall pipe (110, 160, 200, 250, 315, 400 mm); **2** - DN/ID profiled pipe (300, 400, 500, 600, 800, 1000);

3 - DN/OD profiled pipe (160, 200, 250, 315, 400 mm); **4** - _____

	Inlet type	DN, mm	Height above the outlet flow channel z (from T to T₁ , m)	Connection angle, °	FOR INSPECTION: height above chamber base h (from P to T/T₁ , m)	Notes
Outlet				0		
Inlet 1						
Inlet 2						
Inlet 3						
Inlet 4						
Inlet 5						
Inlet 6						

Project name: _____

Customer: _____

Contact person: _____

Phone/E-mail: _____