


TECHNICAL DATA SHEET

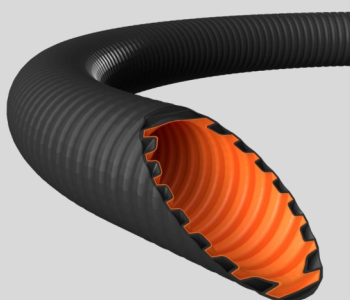

Compression strength:
1250 N/5cm

Open product

EVOEL FHs-UV-0H-SMART

Corrugated halogen-free conduits
With UV-stabilisation

Conformity:
EN 61386-1
EN 61386-22
EN 50642
Classification: 44433

PRODUCT DESCRIPTION

Flexible electrical installation conduit made of a special, halogen-free material and ideally suitable for outdoor installations exposed to direct sunlight. The conduit has a sheath made of a plasticised material which is specially modified for resistance against UV radiation. The conduit features the highest degree of impact strength. The special structure of the inner surface of the conduit with outstanding gliding properties allows to considerably extend the cable-pulling distances and reduce the length of installation work. The colour of the sheath of the conduits is black, with an orange inner gliding layer.

Material: halogen-free material, compression strength 1250 N/5cm, temperature resistance from - 25 to +105°C, UV-stabilised, self-extinguishing, corrosion-resistant.

Conduit is produced according to: EN 61386-1, EN 61386-22, EN 50642 standard specifications.

APPLICATION AREA

The conduits are specifically recommended for outdoor installations, can be used for installations in hollow walls, partitions, or suspended ceilings in public buildings: schools, kindergartens, hospitals, hotels, theatres, cinemas, museums, stadiums, arenas, malls, airports, railway stations, and office buildings. The conduit withstands long-term exposure to sunlight. UV-resistance is guaranteed for 10 years. Especially suitable for protection of facade lighting cables.

PRODUCT DIMENSIONS

Nominal size	16	20	25	32	40	50
Outside OD, mm	16.0	20.0	25.0	32.0	40.0	50.0
Inside ID, mm	10.8	13.6	17.8	23.1	30.0	38.4
Roll, m	50	50	50	50	25	25
On pallet, m	2400	1500	1000	600	350	300
Bend radius ≥ mm	110	140	160	180	200	300

PRODUCT PARAMETERS

Parameter	Value	Test method
Material	Special plastic	
UV radiation resistance	10 years	
Combustion	Flame retardant, self-extinguishing	EN 61386-1
Impact strength, J at 25°C	>6 J	EN 61386-1
Compression strength, N/5cm	>1250	EN 61386-1
Temperature resistance, min/max °C	-25 .. 105 °C	EN 61386-1
Total halogen content %	≤ 0,40 %	EN 50642
Flexibility	Pliable	EN 61386-1

TECHNICAL DATA SHEET

EVOEL classification codes according to EN 61386-1

Digit in the classification code										
1		2		3		4		5		
Compression strength		Impact strength		Minimum operating temperature t°		Maximum operating temperature t°		Flexibility		
Codification number	1	125N very low	1	0.5J (0.5 kg/100mm) very low	1	+5°C	1	+60°C	1	rigid
	2	320N low	2	1J (1.0 kg/100mm) low	2	-5°C	2	+90°C	2	pliable
	3	750N medium	3	2J (2.0 kg/100mm) medium	3	-15°C	3	+105°C	3	pliable/self recovering
	4	1250N high	4	6J (2.0 kg/300mm) high	4	-25°C	4	+125°C	4	flexible
	5	4000N very high	5	20.4J (6.8 kg/300mm) very high	5	-45°C	5	+150°C		
							6	+250°C		
							7	+400°C		

Example: electrical installation conduit with high compression strength (4), high impact strength (4), minimum operating temperature -25°C (4), maximum operating temperature +105°C (3), pliable/ self recovering (3).

STANDARTS APPLICABLE TO CONDUITS

Number	Title
EN 61386-1	Conduit systems for cable management - Part 1: General requirements.
EN 61386-21	Conduit systems for cable management - Part 21: Particular requirements. Rigid conduit systems.
EN 61386-22	Conduit systems for cable management - Part 22: Particular requirements. Pliable conduit systems.
EN 61386-23	Conduit systems for cable management - Part 23: Particular requirements. Flexible conduit systems.
EN 50642	Cable management systems—Test method for content of halogens.
EN 50267-2-2	Common test methods for cables under fire conditions - Test on gases evolved during combustion of materials from cables. Parts 2-2: Procedures. Determination of degree of acidity of gases for materials by measuring pH and conductivity.
EN 61034-2	Measurement of smoke density of cables burning under defined conditions. Part 2: Test procedure and requirements.
EN 60332-1-2	Tests on electric and optical fibre cables under fire conditions. Parts 1-2: Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame.
EN 60332-1-3	Tests on electric and optical fibre cables under fire conditions. Parts 1-3: Test for vertical flame propagation for a single insulated wire or cable. Procedure for determination of flaming droplets/particles.
EN 61386-24	Conduit systems for cable management - Part 24: Particular requirements for conduit systems buried underground.