

TECHNICAL DATA SHEET

Reduction socket UV

For smooth-wall pipes

Conformity:
EN 1852


PRODUCT DESCRIPTION


Reduction socket from polypropylene (PP) with an integrated sealing ring which grants a hermetic seal (pressure rating $\geq 0,5$ bar). PUR coating increases resistance to UV radiation to 10 years.

Material: Polypropylene (PP)

Colour: grey (other colours available on request).


APPLICATION AREA

Water drainage systems for bridges and overpasses with a direct exposure to sunlight.

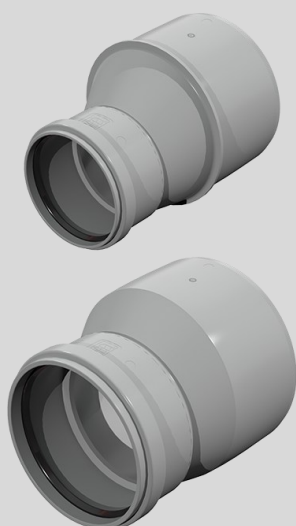

PRODUCT DIMENSIONS

DN/OD1 [mm]	DN/OD2 [mm]	D [mm]	L1 [mm]	Z [mm]	C [mm]	L [mm]
160	110	128,2	80	43	59	182
200	110	129,2	117	73	64	254
200	160	183	98	45	75	218
250	200	230,6	144	70	100	314
315	200	230,6	171	107	100	378
315	250	290,8	171	92	123	386
400	250	290,8	209	141	123	473
400	315	361,1	209	155	146	510

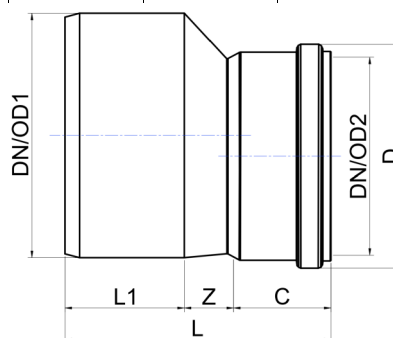

PRODUCT PARAMETERS

Parameter	Value
Material	PP
Water tightness	0.5 bar
UV radiation resistance	10 years