

TECHNICAL DATA SHEET


 Class:
D400

MEILEVEL-A DN800

Self-leveling type class D400 chamber cover

 Conform to EN 124-2
RAL-GZ692
Class: D400


PRODUCT DESCRIPTION

Self-leveling cover with large service opening – 800 mm. The cover is equipped with MEIPREN cushioning inserts, extending service life and ensuring noise reduction. Frame has a built-in MEISTEP socket to ensure safe personal entrance (according to DIN 19572). EIFLEX function gives an opportunity to reduce height of the frame by 20 mm if necessary. Cover has increased opening holes – easier to open even when it is full of dirt. The cover fits perfectly in the frame and is secured by its own weight. Certified by an independent institute (KIWA) in accordance with EN 124 and tested according to RAL-GZ692. A certificate is available for confirmation.

Material: cast iron and concrete, Weight: 200 kg

Height: 160 mm (can be reduced to 140 mm)

Standards: EN 124-2, RAL-GZ692, DIN 1229


Country of origin: Germany

APPLICATION AREA

By the application cover corresponds to 4th group of EN 124 (class D400) which states that cover can be used on carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.

PRODUCT DIMENSIONS

Parameters	Nominal size — DN800
Outer diameter of the frame, mm	1100
Opening, mm	800
Height, mm	160 (140)
Frame neck size, mm	915

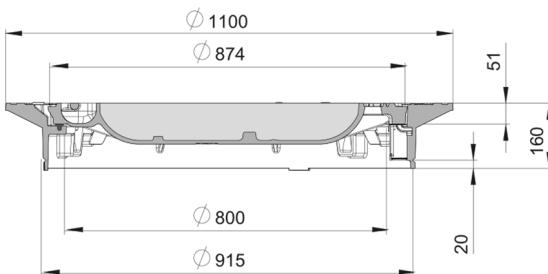


PRODUCT

Parameters	Description	Standard
Material	Cast iron and concrete	EN 124-2
Load capacity, kN	400	EN 124-2, RAL-GZ692
Weight, kg	200	

TECHNICAL DATA SHEET

Selection of chamber cover depending on the designed traffic load at the installation place (according to the requirements of EN 124).

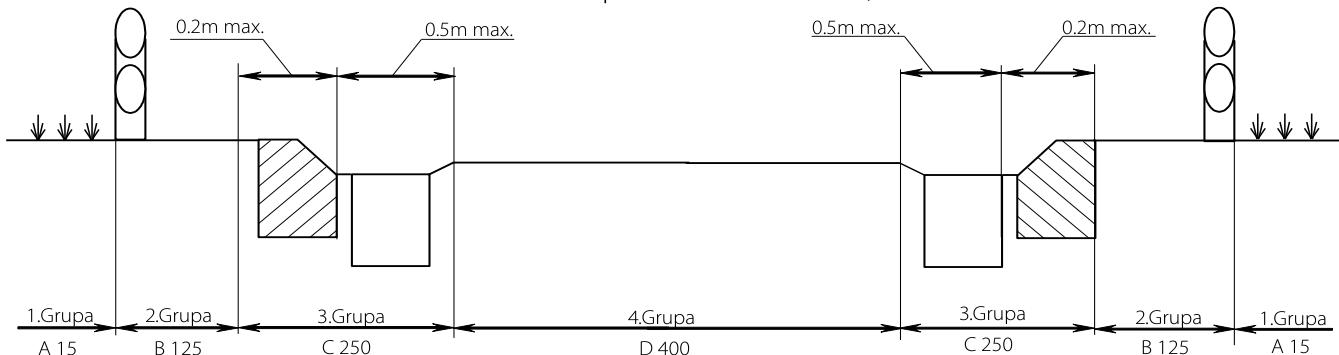

Cross section of street where different groups of chamber covers are displayed according to EN 124.

Group	Class	Load, kN (t)	Application area
1st group	A 15	15 (1.5)	Areas which can only be used by pedestrians and pedal cyclists.
2nd group	B 125	125 (12.5)	Pedestrian areas and comparable areas, car parks or car parking decks.
3rd group	C 250	250 (25)	For gully tops, installed in the area of kerbside channels of roads which, when measured from the kerb edge, extends a maximum of 0,5m into carriageway and a maximum of 0,2 m into the pedestrian area.
4th group	D 400	400 (40)	Carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.
5th group	E 600	600 (60)	Areas imposing high wheel loads, e.g. docks, aircraft pavements.
6th group	F 900	900 (90)	Areas imposing particularly high wheel loads, e.g. aircraft pavements.

Corresponding standards

No.	Title
EN 124	Gully tops and manhole tops for vehicular and pedestrian areas. Design requirements, type testing, marking, quality control.
EN 124-1	Gully tops and manhole tops for vehicular and pedestrian areas. Definitions, classification, general principles of design, performance requirements and test methods.
EN 124-2	Gully tops and manhole tops for vehicular and pedestrian areas. Gully tops and manhole tops made of cast iron.
EN 124-3	Gully tops and manhole tops for vehicular and pedestrian areas. Gully tops and manhole tops made of steel or aluminium alloys.
EN 124-4	Gully tops and manhole tops for vehicular and pedestrian areas. Gully tops and manhole tops made of steel reinforced concrete.
EN 124-5	Gully tops and manhole tops for vehicular and pedestrian areas. Gully tops and manhole tops made of composite materials.
EN 124-6	Gully tops and manhole tops for vehicular and pedestrian areas. Gully tops and manhole tops made of polypropylene (PP), polyethylene (PE) or unplasticized poly (vinyl chloride) (PVC-U).