

# TECHNICAL DATA SHEET



## ULTRASTRESS PROTECT TRACER

HDPE (type PE100-RC) potable water pipes  
with integrated signal wire

According to PAS 1075 Type 3  
Conforms to: EN 12201-2




DN/OD 32-63 mm	P1R0571	SDR 11
DN/OD 75-225 mm	P1R0574	SDR 17
DN/OD 250-630 mm	P1R0577	

### PRODUCT DESCRIPTION

ULTRASTRESS PROTECT TRACER water supply pressure pipes made from PE100-RC material with integrated signal wires and added polypropylene (PP) protective layer. PE100-RC/PP material pipes are resistant to long term expansion of cracks, scratching and point type loads which are especially common during assembly of the pipelines using trenchless installation methods (for instance, as a result of friction against the stones that are present in the soil). PE100-RC pipes with PP layer provide additional durability against scratching in cases of especially complex installation, e.g. installation in old pipe.

Material: High density crack resistant polyethylene PE100-RC with polypropylene (PP) layer. Core pipe is black in colour with blue stripe and outer layer is blue with green stripes. Pipes are manufactured according to: EN 12201-2, PAS 1075 specifications.

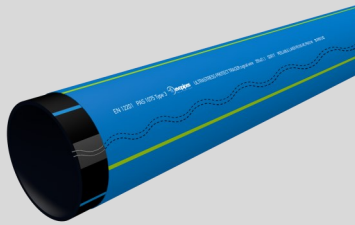

### APPLICATION AREA

ULTRASTRESS PROTECT pipes are designed for water pressure systems, with recommended installation methods of pulling in the site of the old pipe with or without the destruction of the old pipe according to EN 12889, EN 14457.

#### PE100-RC / PP



According to PAS 1075:

#### Type 3

### PRODUCT DIMENSIONS

Core pipe dimensions conform to EN 12201-2 specifications. Core pipe nominal pressure according to EN12201-2 (with C=1,25 at temperature 20 °C) PN10 bar for SDR 17 pipe and PN16 for SDR 11 core pipe.

Core pipe dimensions		PP layer	Main dimensions	Length
d <sub>n</sub> x e <sub>tr</sub> mm		e <sub>m</sub> , mm (±10%)	D <sub>m</sub> mm	L, m
SDR 17	SDR 11			
32 x 2,0	32 x 3,0	~ 0,9	33,8	100-2000
40 x 2,4	40 x 3,7	~ 1,0	42	100-1000
63 x 3,8	63 x 5,8	~ 1,0	65	100-600
90 x 5,4	90 x 8,2	~ 1,5	93	100-200
110 x 6,6	110 x 10,0	~ 1,8	113,6	12 / 13,4 / 20 / 50
125 x 7,4	125 x 11,4	~ 2,0	129	12 / 13,4 / 20
160 x 9,5	160 x 14,6	~ 2,0	164	12 / 13,4 / 20
200 x 11,9	200 x 18,2	~ 2,0	204	12 / 13,4 / 20
225 x 13,4	225 x 20,5	~ 3,0	231	12 / 13,4 / 20
250 x 14,8	250 x 22,7	~ 3,0	256	12 / 13,4 / 20
280 x 16,6	280 x 25,4	~ 3,0	286	12 / 13,4 / 20
315 x 18,7	315 x 28,6	~ 3,0	321	12 / 13,4 / 20
355 x 21,1	355 x 32,2	~ 4,0	363	12 / 13,4 / 20
400 x 23,7	400 x 36,3	~ 4,0	408	12 / 13,4 / 20
450 x 26,7	450 x 40,9	~ 4,0	458	12 / 13,4 / 20
500 x 29,7	500 x 45,4	~ 4,0	508	12 / 13,4 / 20
560 x 33,2	560 x 50,8	~ 5,0	570	12 / 13,4 / 20
630 x 37,4	630 x 57,2	~ 5,0	640	12 / 13,4 / 20



Open product

# TECHNICAL DATA SHEET



## ULTRASTRESS PROTECT TRACER


HDPE (type PE100-RC) potable water pipes  
with integrated signal wire

According to PAS 1075 Type 3  
Conforms to: EN 12201-2



DN/OD 32-63 mm	P1R0571	SDR 11
DN/OD 75-225 mm	P1R0574	SDR 17
DN/OD 250-630 mm	P1R0577	

### PRODUCT PARAMETERS

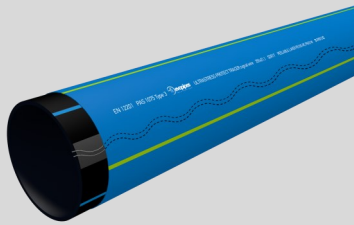

Parameter	Value	Test method
Material	Core pipe: PE100-RC Outer layer: PP	PAS 1075
Hydrostatic pressure resistance (80 °C, 5 MPa)	>1000 h	EN ISO 1167-1 EN ISO 1167-2
Tensile elongation	>350%	EN ISO 6259-1
Resistance to crack growth (80 °C, 4 N/MPa, 2% Arkopal N-100)	>8760 h	ISO 16770
Resistance to slow crack growth (80 °C, 9.2 bar)	>8760 h	EN ISO 13479
Mass flow rate MFR (5 kg, 190 °C, 10 min)	0.25 ± 20%	EN ISO 1133
Oxidation induction time (200 °C)	≥20% min	ISO 11357-6
Longitudinal reversion (e <sub>r</sub> ≤ 16 mm, 110 °C)	≤3%	EN ISO 2505
Chemical resistance	pH 2 ≥ pH ≥ pH 12	ISO/TR 10358

### PRODUCT MARKING

**PE100-RC / PP**

According to PAS 1075:

**Type 3**

**Open product**

#### Protective layer marking

Aspect	Marking
Standard number	EN 12201
Material requirements and type	PAS 1075 Type 3
Manufacturers information	EVOPIPES
Product identification	ULTRASTRESS PROTECT TRACER
Signal wire resistivity	3.6 Ω x m
Core pipe dimensions (diameter x wall thickness)	e.g. 110 x 6,6
SDR series	e.g. SDR 17
Extrusion type	PEELABLE PP LAYER
Material	PE100-RC
Core pipe pressure rating (bar)	e.g. PN10
Intended application (W-potable water)	W
Date of production	date
QA organization signature	Nordic Poly Mark, DIN CERTO

#### Core pipe marking

Standard number	EN 12201
Material requirements and type	PAS 1075 Type 1
Manufacturers information	EVOPIPES
Dimensions (diameter x wall thickness)	e.g. 110 x 6,6
SDR series	e.g. SDR 17
Material	PE100-RC
Pressure rating (bar)	e.g. PN10
Intended application (W-potable water)	W
Date of production (dd/mm/yy)	date
QA organization signature	Nordic Poly Mark, DIN CERTO